LUMAERA MidiSQ Pendant


Pendant

What to Know

Risk of fire and electrical shock. Installation requires knowledge of electrical systems and should be installed by a qualified electrician. If not qualified, **DO NOT ATTEMPT INSTALLATION.**



Mark hole locations on the installation surface matching locations of the mounting hardware. Adjust cables to desired length and cut if needed.

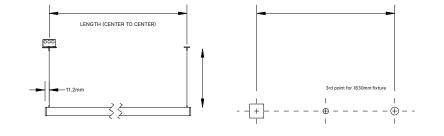

Suspension Distance (Center to Center)	
Fixture Length (Nominal)	Hole Distance
1220mm (4'), 2 points	1203.5mm
1830mm (6'), 2 points	1810mm
2440mm (8'), 3 points	2420mm




Attach the adjustable cable gripper to the canopy and feed the power cables through the gripper.






Feed the DC cables to the Junction box and secure the fixture using the appropriate hardware. Connect the DC cord to the supplied driver box. Connect AC power to the Driver Box. If your fixture has an Indirect light source, chose the correct driver for each power cord.





Repeat Step 3 at the other end of the fixture if there is an indirect light source. Otherwise, secure the non-powered end of the fixture to the ceiling with the appropriate hardware.




Care Instructions:

Wipe with a soft cloth only. Always avoid using harsh chemicals and/or cleaners.



Final installation. Refer to the wiring diagram.



LUMAERA MidiSQ Pendant

Wiring Diagram

Driver

