



LUMAERA TIR

VEXICA

Resin Encapsulated Linear LED Luminaires with TIR Grazing
Optics in a Choice of Static and Dynamic Colour Options
19mm, 37mm, 44mm & 77mm Widths | Outdoor & Indoor Use

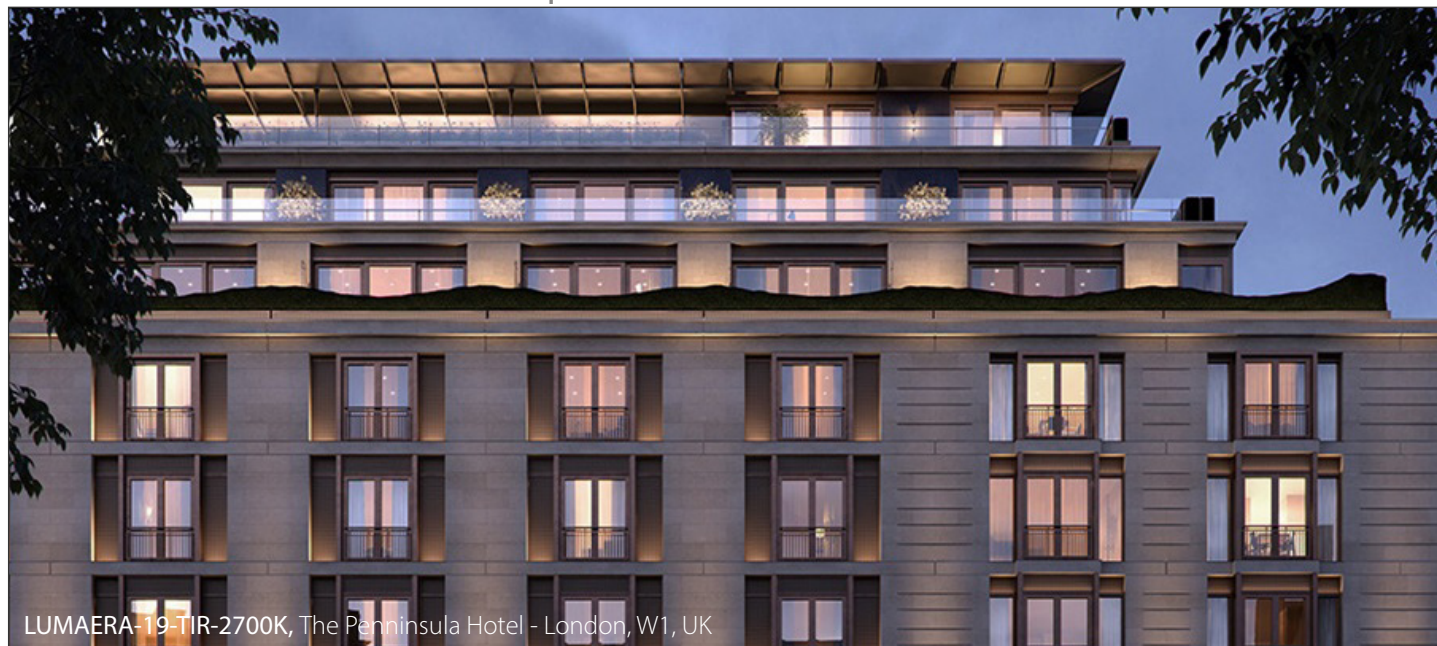

LUMAERA-19-TIR-2700K, The Peninsula Hotel - London, W1, UK

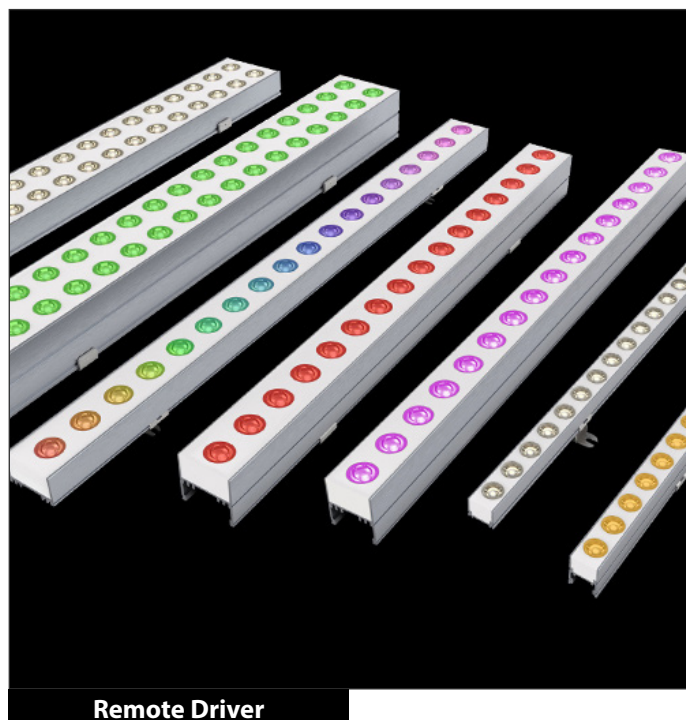

Remote Driver

**MADE IN
BRITAIN**®

Features & Benefits

Continuous Linear Light

Flush and 'H' profile options allow for side or bottom entry cable management, and end-to-end mounting for a continuous linear effect.

Wide Range of LED Selections

Static White, RGB, RGB Dynamic & RGBW options are available at CRI 80, 90 & 95. For availability per model, please see the relevant section of this guide.

Resin Encapsulation Technology

Luminaires encapsulated in polyurethane resin to ensure environmental robustness and longevity.

TIR Grazing Optics

A selection of beam angles are available.

Choose Your Length

Available in a wide range of lengths (105mm - 1605mm) and up to 9.6m of lumination from one driver.

Customisable

Speak to your Vexica representative about any specific requests you have for your project.

Compliance

UKCA, CE, IP67

5-Year Warranty

Standard 5-year warranty, L90 (Static White) @ ~50,000 hours.

LIGHT OUTPUT INFORMATION

Efficacy (lm/W)

Fixture Type	Power Output	Static White					RGB ¹ (inc RGB Dynamic)				RGBW ²			
		2200K	2700K	3000K	3500K	4000K	Max (White)	Red	Green	Blue	Red	Green	Blue	3000K
Lumaera 19	6 W/m	116	119	119	119	126	-	-	-	-	-	-	-	-
	10 W/m	116	119	119	119	126	-	-	-	-	-	-	-	-
	15 W/m	116	119	119	119	126	-	-	-	-	-	-	-	-
Lumaera 37	24 W/m	101	103	105	105	111	32	32	60	11	-	-	-	-
Lumaera 44	24 W/m	101	103	105	105	111	32	32	60	11	41	90	32	74
Lumaera 77	50 W/m	101	103	105	105	111	32	32	60	11	41	90	32	74

Luminaire Lumen Output (lm/m)

Fixture Type	Power Output	Static White					RGB ¹ (inc RGB Dynamic)				RGBW ²			
		2200K	2700K	3000K	3500K	4000K	Max (White)	Red	Green	Blue	Red	Green	Blue	3000K
Lumaera 19	6 W/m	696	714	714	714	756	-	-	-	-	-	-	-	-
	10 W/m	1160	1190	1190	1190	1260	-	-	-	-	-	-	-	-
	15 W/m	1740	1785	1785	1785	1890	-	-	-	-	-	-	-	-
Lumaera 37	24 W/m	2424	2472	2520	2520	2664	768	256	480	88	-	-	-	-
Lumaera 44	24 W/m	2424	2472	2520	2520	2664	768	256	480	88	244	538	192	442
Lumaera 77	50 W/m	5050	5150	5250	5250	5550	1600	533	1000	183	512	1125	400	925

The values above are specified at CRI = 80

For CRI = 90 reduce by 10%; for CRI = 95 reduce by 20%

If the data that you require is missing, please contact your Vexica representative

¹ RGB consists of 3 channels (Red, Green & Blue), each capable of outputting 5W/m. The 'Max (White)' value is taken when all channels are at 100% and the fixture is drawing the maximum total luminaire output of 15W/m.

² RGBW consists of 4 channels each capable of 25% of the maximum total luminaire power output.

Vexica run regular development cycles, continuously optimising and balancing product specifications to best suit our customers. All information therefore, is intended as a guide and specifications may change on occasion without notice or announcement. Technical data is measured under controlled conditions, expected performance is within +/- 10% of advertised figures. Luminaire output stated is actual value from the luminaire itself. Information provided above is intended as a description of the product and shall not be used in the form of any contract.

ELECTRICAL INFORMATION

Power Options	6W/m, 10W/m, 15W/m (Lumaera 19 - Static White Only) 24W/m (Lumaera 37 & 44 - All Options) 50W/m (Lumaera 77 - All Options)
Input Voltage	24 VDC (23V Min, 25V Max)
Dimmable	Yes
Connection Type	JST JWPF IP67 (Lumaera 19 - All options, Lumaera 37, 44 & 77 - RGBW Only) SSL 1.2 IP68 (Lumaera 37, 44 & 77 - All options except RGBW)
LED Binning	3 SDCM (White Only)
Maximum Chain Length	4.8m (Lumaera 19) - 6W/m Version can run to 9.6m 5.0m (Lumaera 37 & 44) 3.0m (Lumaera 77)

PHYSICAL & ENVIRONMENTAL INFORMATION


Housing Colour					
	Anodised Aluminium	Contact Us for Special Projects			
Finish	Extrusion	Silver Anodised Aluminium			
	Resin	Opal Polyurethane			
	Optics	Clear Acrylic (PMMA)			
Ambient Operating Temperature	-10°C to +50°C				
Ambient Storage Temperature	-30°C to +85°C				
IP Rating	IP67				
IK Rating	IK05				
Weight (per Linear Meter)	Lumaera 19	Lumaera 37	Lumaera 44	Lumaera 77	
	Static White	0.45kg	0.87kg	1.03kg	1.81kg
	Tunable & Dynamic	0.56kg	1.10kg	1.30kg	2.27kg

LED CCT/COLOUR OPTIONS


STATIC WHITE
2200K, 2700K, 3000K, 3500K, 4000K




TUNABLE COLOUR^a
RGB LED Colour Mixing
(NOT Lumaera 19)



DYNAMIC COLOUR^b
RGB LED Dynamic Pixels
(Lumaera 44 & 77 Only*)



TUNABLE COLOUR + 3000K^c
RGBW LED Colour Mixing
(Lumaera 44 & 77 Only)




*RGB Dynamic is only available for Lumaera 44 & 77 with a Symmetric 33° TIR optic.

LENGTH (L) OPTIONS


Product	Optic	Minimum Length (mm)	Maximum Length (mm)	Length Increments (mm)	Length Options (mm)
Lumaera 19	TIR Optic	130	1505	125	130, 255, 380, 505, 630, 755, 880, 1005, 1130, 1255, 1380, 1505
Lumaera 37 & 44 (Not RGBW)	TIR Optic	205	1605	200	205, 405, 605, 805, 1005, 1205, 1405, 1605
Lumaera 44 (RGBW Only)	TIR Optic	505	1505	500	505, 1005, 1505
Lumaera 77	TIR Optic	305	1505	300	305, 605, 905, 1205, 1505

BEAM SHAPE SELECTION

Lumaera 19 (+ Lumaera 44 & 77 RGBW Only)

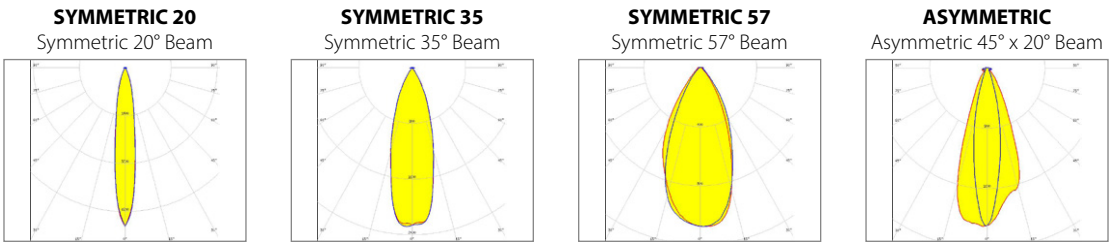

Lumaera 37, 44 (Not RGBW) & Lumaera 77 (Not RGBW)

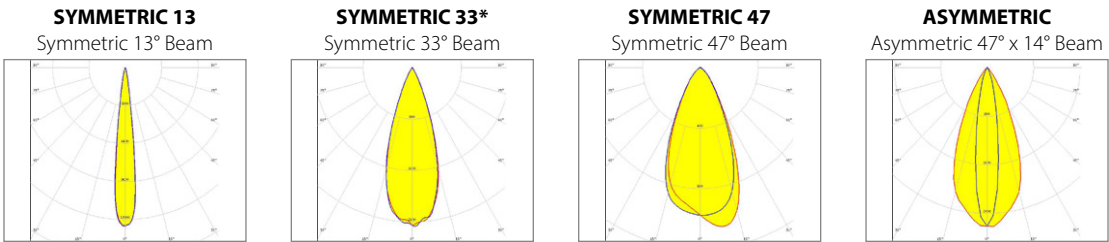

MOUNTING OPTIONS

Lumaera 19

ADJUSTABLE BRACKET
Adjustable Angle, Rear Attachment



ORDER CODE: 018705


FLUSH CLIP
Fixed Angle, Rear Attachment



ORDER CODE: 008189

Lumaera 37

EXTENDED BRACKET
Fixed Angle, Rear Attachment



ORDER CODE: 023667

Lumaera 44

ADJUSTABLE BRACKET
Adjustable Angle, Rear Attachment



ORDER CODE: 018708

FLUSH CLIP
Fixed Angle, Rear Attachment



ORDER CODE: 008984

Lumaera 77

ADJUSTABLE BRACKET
Adjustable Angle, Rear Attachment



ORDER CODE: 018814

FLUSH CLIP
Fixed Angle, Rear Attachment




ORDER CODE: 010831

^aEach colour channel represents 1/3 of the maximum luminaire power output. When all channels are at 100% the luminaire maximum output will be achieved.
^bOnly available with 33° beam angle. Must be used in conjunction with a Vexica HybridDrive6 driver and PSU. Max cable length from driver to first fitting is 1m, any extensions will require additional equipment. Contact your Vexica rep for details.
^cRGBW control is split across 4 channels, with each capable of 25% of the luminaire maximum power rating. When all 4 channels are at 100% the luminaire maximum output will be achieved.


PRODUCT DIMENSIONS

Lumaera 19

Flat Profile | Side Cable Entry

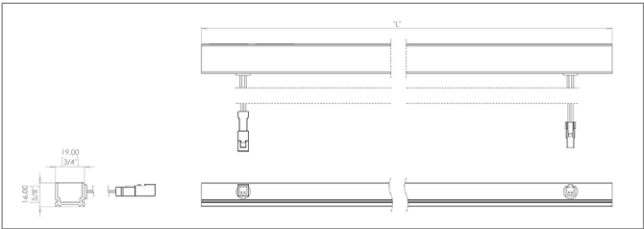


'H' Profile | Rear Cable Entry

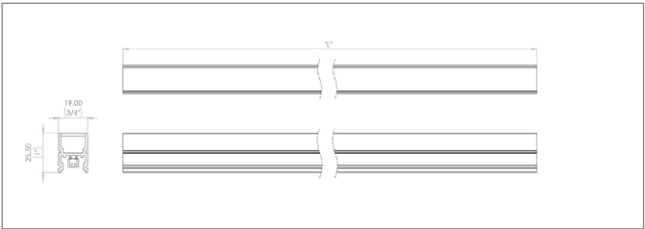


Lumaera 37

'H' Profile | Rear Cable Entry

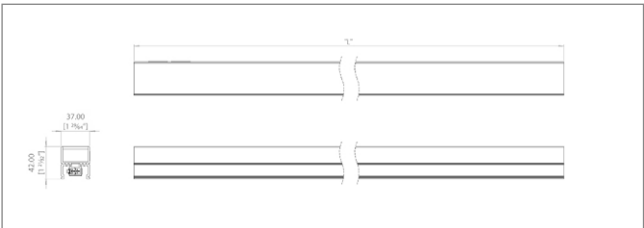


Lumaera 44

Flat Profile | Side Cable Entry

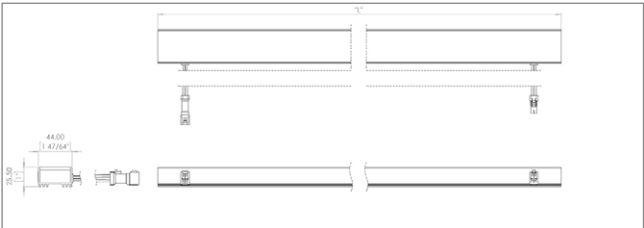


'H' Profile | Rear Cable Entry

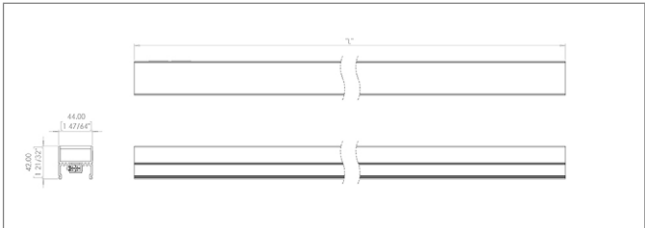


Lumaera 77

Flat Profile | Side Cable Entry

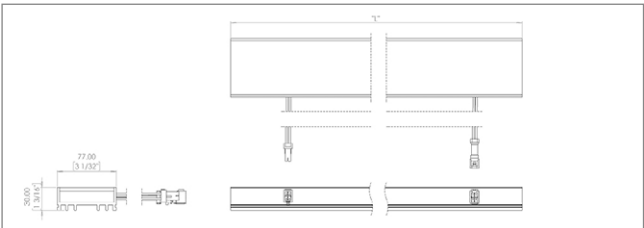


'H' Profile | Rear Cable Entry

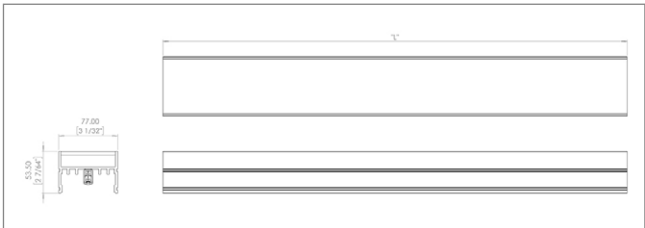


OPTIC SPACING


Lumaera 19
Single Row Centred

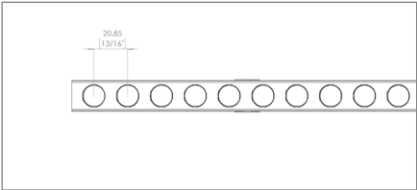

Lumaera 37 & 44
Single Row Centred

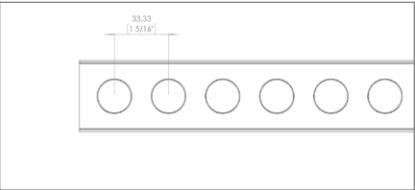

Lumaera 77
Double Row Centred

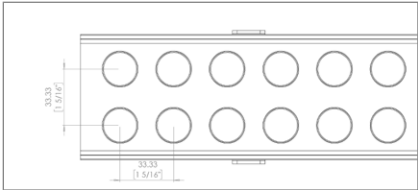

PRODUCT CODE GENERATOR

Project Name

1) FIXTURE & OUTPUT TYPE

PRODUCT	WIDTH		PROFILE		CCT/LED Colour	
VEX-LUMAERA						
Lumaera Linear LED Exterior Luminaire.	19	19mm	-	Flat Profile	2200K	2200K
	37	37mm		(Side Cable Entry)	2700K	2700K
	44	44mm		[NOT Lumaera 37]	3000K	3000K
	77	77mm	H	H Profile	3500K	3500K
				(Rear Cable Entry)	4000K	4000K
					RGB	RGB [NOT Lumaera 19]
					RGB-DYN	RGB Dynamic [Lumaera 44 & 77 with 33° Optic Only]
					RGBW-3000K	Tunable RGBW (3000K) [Lumaera 44 & 77 Only]

2) LUMINAIRE LENGTH (Select For Chosen Width & Optic)

LENGTH							
LUMAERA 19		LUMAERA 37 & 44 (Not RGBW)		LUMAERA 44 & 77 (RGBW)		LUMAERA 77	
130	130mm	205	205mm	505	505mm	305	305mm
255	255mm	405	405mm	1005	1005mm	605	605mm
380	380mm	605	605mm	1505	1505mm	905	905mm
505	505mm	805	805mm			1205	1205mm
630	630mm	1005	1005mm			1505	1505mm
755	755mm	1205	1205mm				
880	880mm	1405	1405mm				
1005	1005mm	1605	1605mm				
1130	1130mm						
1255	1255mm						
1380	1380mm						
1505	1505mm						

3) FIXTURE POWER & IP RATING

POWER OPTION		IP RATING	
		IP67	
6W	6W/m (Lumaera 19 - Static White Only)	IP67	Water & Dust Proof Suitable for outdoor use
10W	10W/m (Lumaera 19 - Static White Only)		
15W	15W/m (Lumaera 19 - Static White Only)		
24W	24W/m (Lumaera 37 & 44 - All Options)		
50W	50W/m (Lumaera 77 - All Options)		

4) BEAM ANGLE (Select for chosen width)

BEAM ANGLE			
LUMAERA 19 (+LUMAERA 44 & 77 RGBW ONLY)		LUMAERA 37, 44 (NOT RGBW) & 77 (NOT RGBW)	
20	Symmetric 20°	13	Symmetric 13°
35	Symmetric 35°	33	Symmetric 33° (Must be selected when RGB-DYN is specified)
57	Symmetric 57°	47	Symmetric 47°
45x20	Asymmetric 45° x 20°	47x14	Asymmetric 47° x 14

PRODUCT CODE:

EXAMPLE: VEX - LUMAERA - 19 - H - TIR - 2200K - 1005 - 15W - IP67 - 45x20

STANDARDS & CERTIFICATIONS

Compliance

Standard Marks



Environmental Suitability

Sustainability	Responsibly manufactured from materials that are free from 'Red List' chemicals
Recyclable	Partially recyclable. Optics and anodized parts are fully recyclable at end of life.
Reliability	
Manufacturing	All Vexica products are manufactured in our UK-based factory using components sourced from internationally recognised 'tier 1' suppliers
Quality Assurance	Each product is designed and manufactured for reliability and each batch undergoes thorough quality assurance testing

Warranty & Terms

Terms & Conditions

Warranty Registration

For details on our warranty and business terms, please click or scan the QR Code.

Notes

